

Series 6000 Softener Systems



The CUNO® Series 6000 are complete single vessel systems designed for ease of operation and contain an automatic valve that stops the water flow simply by twisting the cartridge. This feature not only eliminates the need for external valves, but also prevents the water supply from being accidentally turned on with the cartridge removed. Systems are designed to remove hardness, sediment, taste and odor.

All systems use CUNO proven valve-in-head technology. This high tech feature engineered into each system allow the compact design to be installed in locations where other systems could not. Systems are constructed completely of FDA compliant food grade, high impact plastic.

Four premium styles are available for different water conditions.

CFS6090 for softening, sediment uses high capacity cationic exchange resin to remove hardness up to 900 grains and premium performance 5 micron graded density for filtration.

CFS6090-C for softening, taste/odor, sediment uses high capacity cationic exchange resin to remove hardness up to 650 grains, premium performance 5 micron graded density media for filtration, and high capacity carbon to reduce chlorine taste and odor.

CFS6135 for softening, sediment uses high capacity cationic exchange resin to remove hardness up to 1,350 grains and premium performance 5 micron graded density media for filtration.

CFS6135-C for softening, taste/odor, sediment uses high capacity cationic exchange resin to remove hardness up to 1,100 grains, premium performance 5 micron graded density media for filtration, and high capacity carbon to reduce chlorine taste and odor.

The CUNO Series 6000 line of softener/filter systems are designed for strength, versatility and convenience.

Features

- Built-in automatic shut-off valve in filter head.
- Automatic pressure venting.
- Pressure tested. High impact plastic construction.
- 3/8" NPT vertical connection.
- Manufactured from FDA CFR-21 compliant materials.
- Compatible with different CUNO premium filter cartridges.

Benefits


- No external valves. No need to turn off water supply prior to removing cartridge, eliminates the chance of cartridge removal with water on.
- No need to manually vent pressure by opening or operating equipment downstream of filter.
- Lead free and corrosion resistant. Self lubricating design for years of trouble free service.
- Compatible with most common food service equipment and tubing.
- Suitable for use in food service establishments.
- Allow a choice of filters to provide the degree of filtration and cost of operation the operator desires.

SOFTENER

Spec No. _____

Installation Tips

- Check operating parameters of food service equipment before shutting off water supply.
- A small amount of water will escape when removing cartridge due to pressure automatically being vented.
- When changing cartridges the Model CFS6090-C system should be flushed to vent trapped air and carbon fines. This will quickly clear.
- For cold water use only.
- For commercial use only.

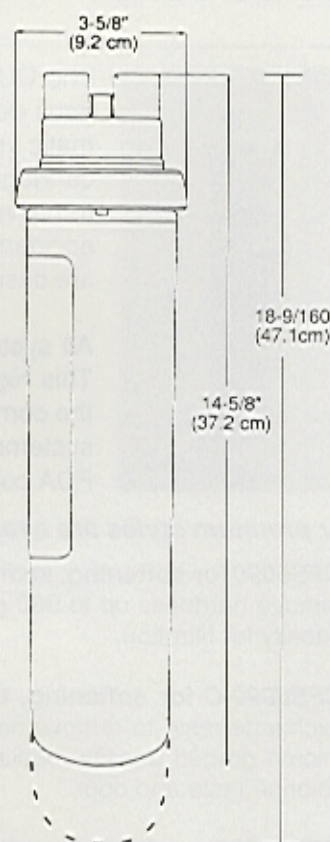

Made from FDA*
CFR-21 Compliant
Materials
*Food and Drug
Administration of US

SPECIFICATIONS

MODEL NO.	CONNECTION SIZE	DIMENSIONS		SERVICE FLOW RATE	CHLORINE CAPACITY	SOFTENING	WATER TEMP.	WATER PRESSURE	REPLACEMENT CTG. NO.
		HEIGHT	MAX. DIA.						
CFS6090	3/8" NPT	14-5/8" (37.2 cm)	3-5/8" (9.2 cm)	0.5 gpm (1.9 lpm)	N/A	900 grains	40-100°F (4.4-38°C)	25-125 psi (172-862 kPa)	SWC900
CFS6090-C	3/8" NPT	14-5/8" (37.2 cm)	3-5/8" (9.2 cm)	0.5 gpm (1.9 lpm)	250 gal (946.1 lit.)	650 grains	40-100°F (4.4-38°C)	25-125 psi (172-862 kPa)	SWC900-C
CF6135	3/8" NPT	18 9/16" (47.1 cm)	3-5/8" (9.2 cm)	0.5 gpm (1.9 lpm)	N/A	1,350 grains	40-100°F (4.4-38°C)	25-125 psi (172-862 kPa)	SWC1350
CFS6135-C	3/8" NPT	18 9/16" (47.1 cm)	6 5/16" (16 cm)	0.5 gpm (1.9 lpm)	250 gal (946.1 lit.)	1,100 grains	40-100°F (4.4-38°C)	25-125 psi (172-862 kPa)	SWC1350-C

Distributed by:

LIMITED ONE-YEAR WARRANTY

CUNO, Inc. warrants to the original purchaser-consumer that this Product is free of defects in materials and workmanship. Any defect, malfunction, or other failure of the product to conform to this Warranty will be remedied by CUNO.

This warranty, together with any and all warranties implied by law, shall be limited to a duration of one (1) year from the date of original purchase by the consumer.

This Warranty does not apply to defects that result from abuse, misuse, alteration or damage not caused by CUNO.

SERVICE WORLDWIDE

CUNO Filtration Asia Pte Ltd
1 Tech Park Crescent
Tuas Tech Park
Singapore 638131

CUNO K.K.
Hodogaya Station Building 6F
1-7, Iwai-cho, Hodogaya-ku
Yokohama 240 Japan

CUNO Pacific Pty Ltd
P.O. Box 6767
140 Sunnyholt Road
Blacktown, N.S.W. 2148
Australia

Cuno Latina Ltd.
Rua AMF do Brasil 251A
18120-000 Mairinque SP
Brasil

CUNO Europe S.A.
1 Boulevard de l'Olse
95030 Cergy-Pontoise Cedex
France



Water Filter Systems

CUNO Incorporated
400 Research Parkway
Meriden, CT 06450, U.S.A.
Toll Free: 1-800-243-6894
in CT: 203-237-5541, Ext. 861
Visit us at WWW.CUNO.COM